


KL-4310M-4310F-2W — Fixed Coaxial Attenuator

4.3-10 Male to 4.3-10 Female, 2 W, DC–6 GHz

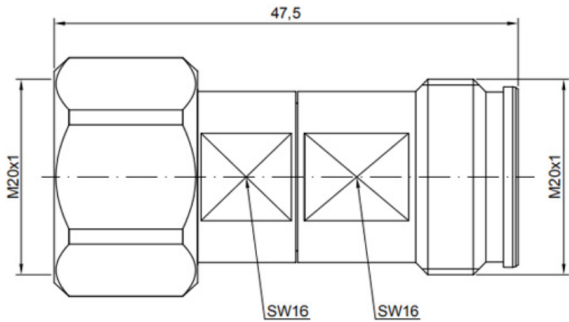

■ **Electrical Data**

Parameter	Value
Impedance	50 Ω
Frequency Range	DC – 6 GHz
VSWR	≤ 1.3 : 1
Standard Attenuation Values	3, 6, 10, 20, 30 dB
Attenuation Accuracy	± 0.5 dB
Input Power (CW)	2 W

■ **Mechanical Data**

Parameter	Value
Durability (Mating Cycles)	≥ 500 times
Operating Temperature	–20°C ~ +85°C
Overall Length	47.5 mm
Thread	M20 x 1 (both ends)
Wrench Flat	SW16

■ **Material & Plating**

Component	Material / Finish
Center Contact	Phosphor Bronze, Ternary Alloy Plated
Outer Contact	Brass, Ternary Alloy Plated
Dielectric	PTFE